


MOVE THE WORLD FORWARD

# HYPER INVERTER

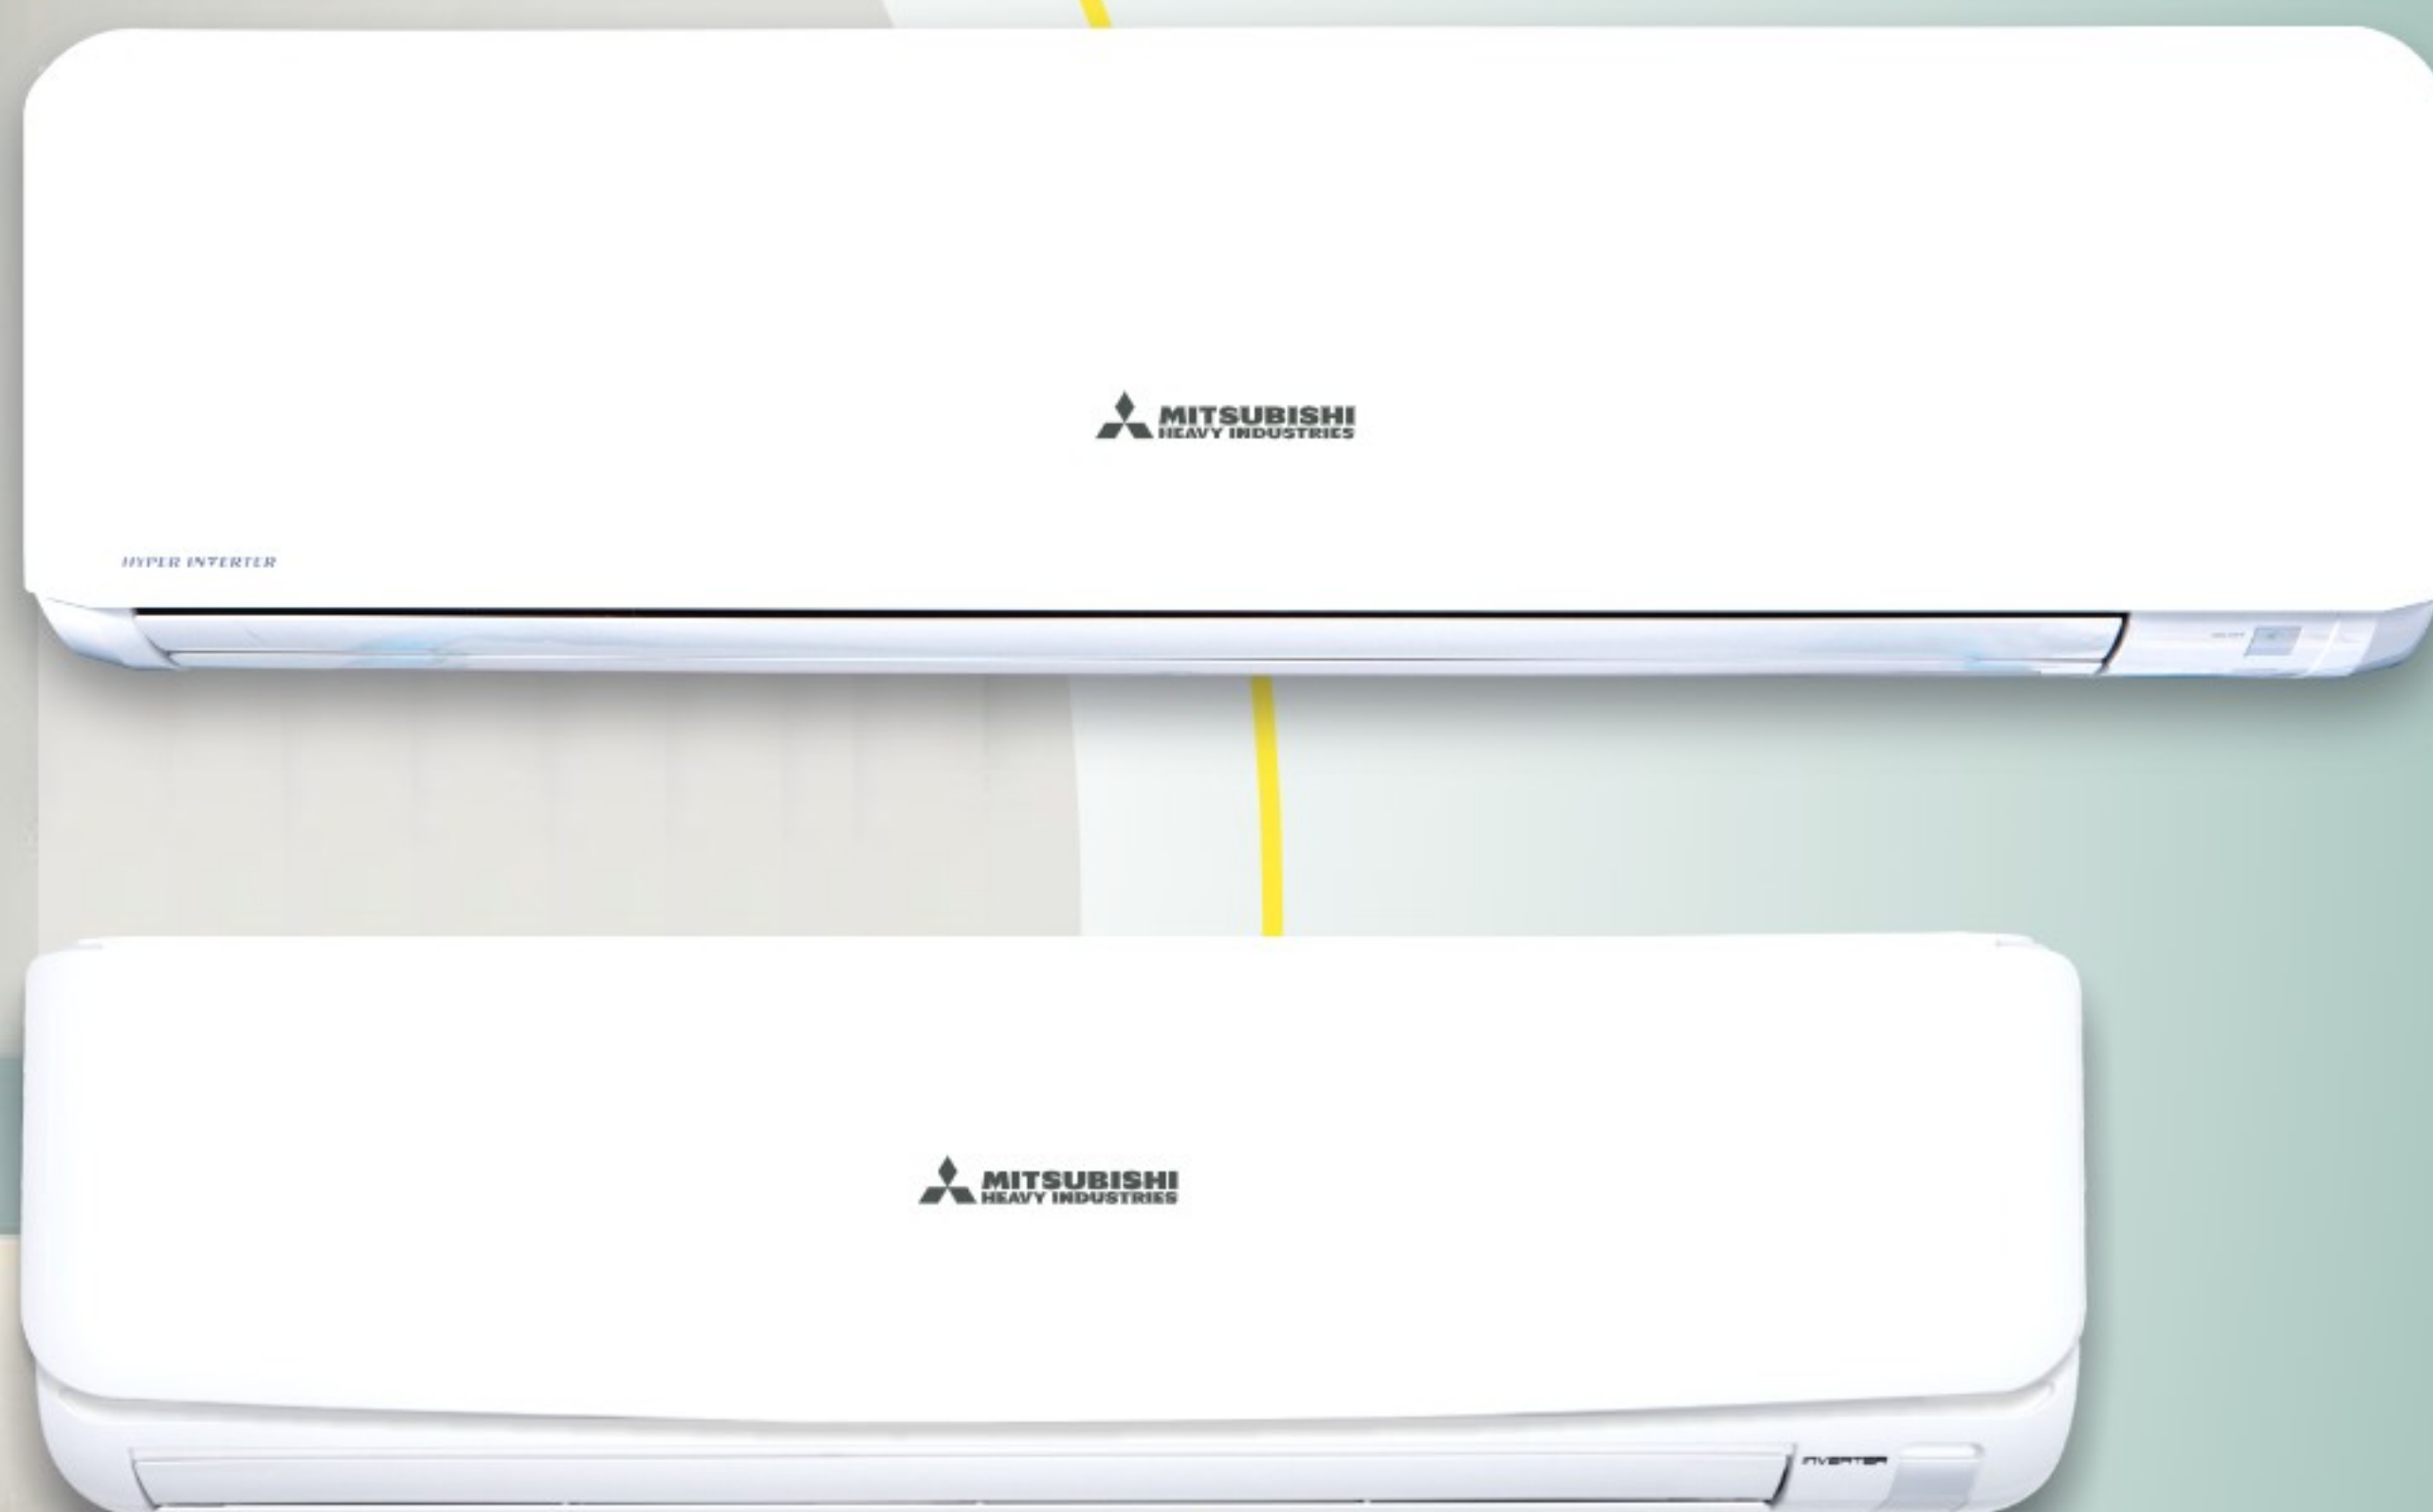


Next  
Generation  
High  
Performance  
Airconditioning

MADE IN THAILAND



# Hyper Inverter

Cooling Only

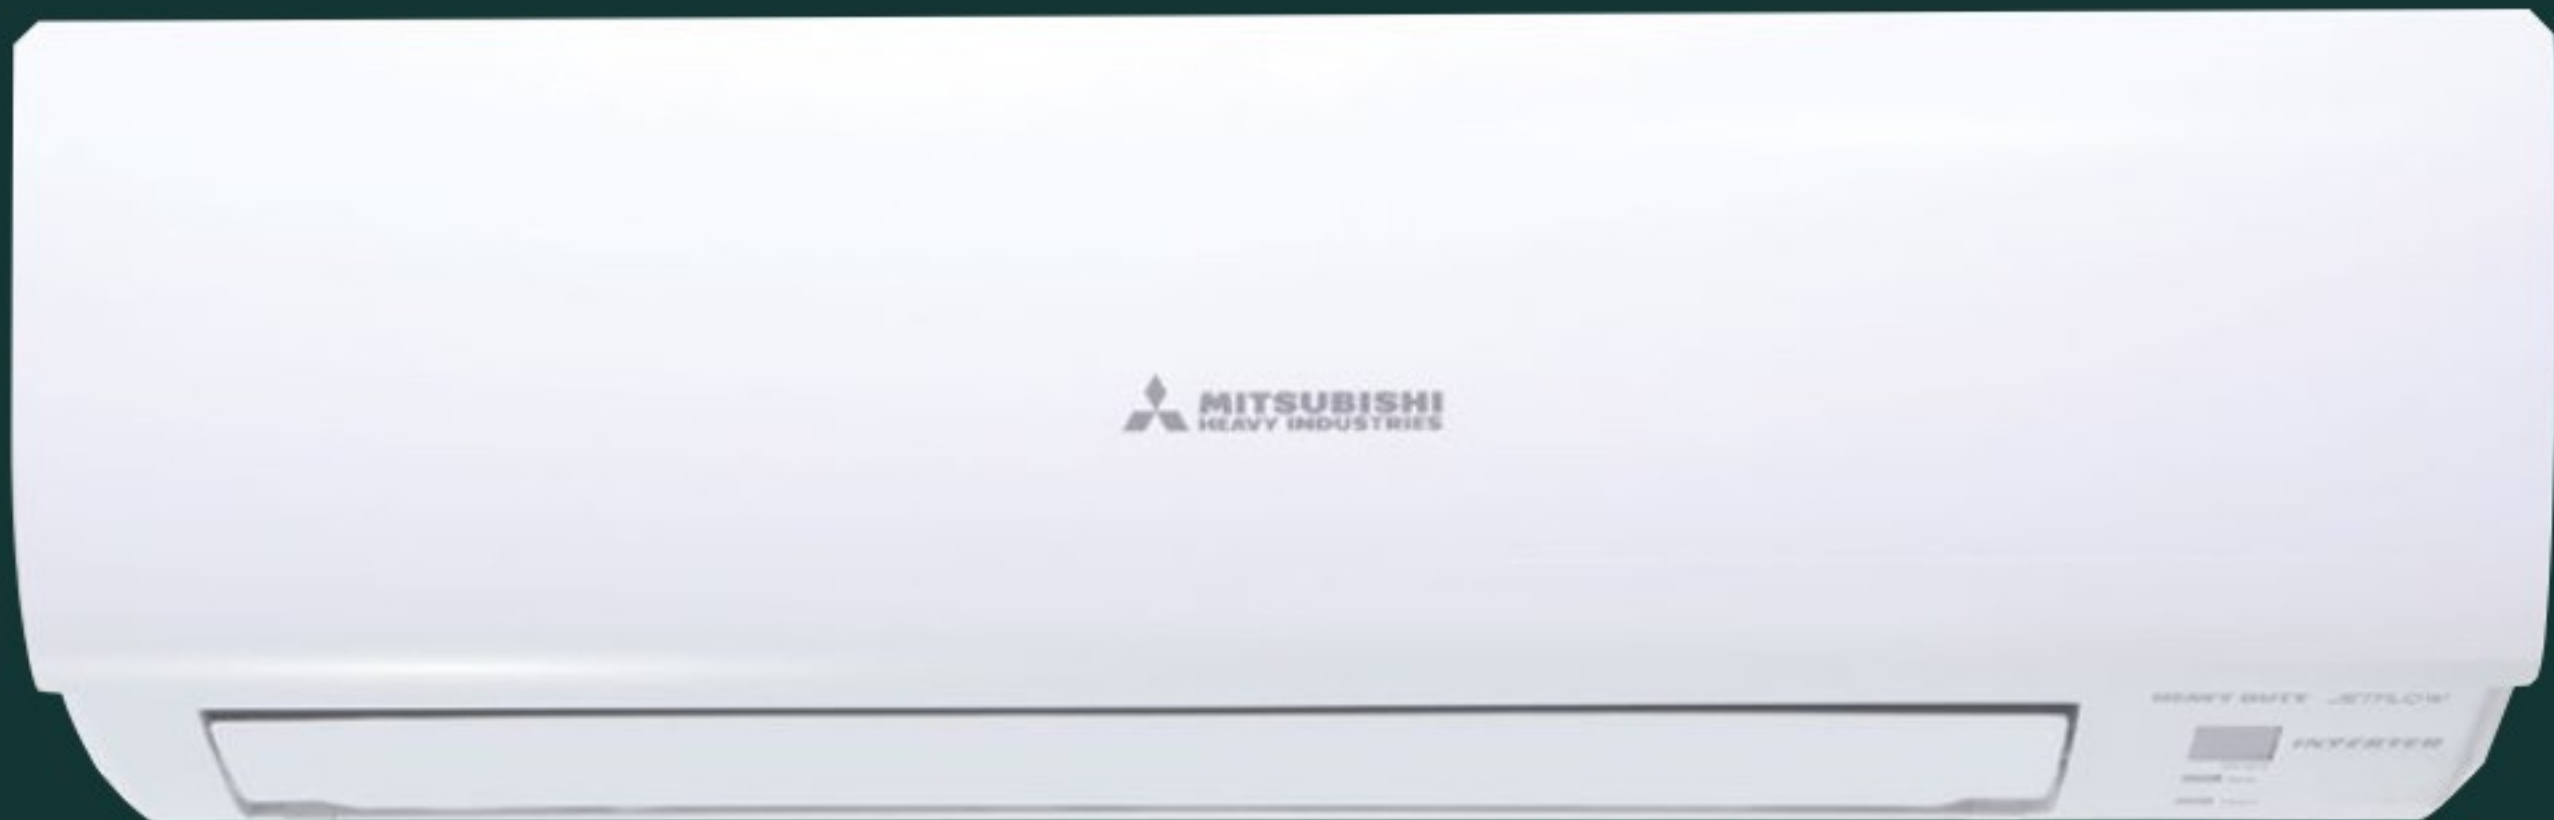

SRK13YXP-W6 1.0 Ton ( 0.23 Ton ~ 1.05 Ton )



## LONG REACH AIR FLOW

Powerful air flow is realized by Jet technology. Good for large living rooms and shops. Increase your comfort.



\*\*under Standard Installation & Lab Test Conditions & In Comparison To A Non Star Rated Air Conditioners




# Specifications



ECO SMART - HYPER INVERTER (R32) - COOLING ONLY			
MODEL	Unit		SRK13YXP-W6
	Indoor Unit		SRK13YXP-W6
	Outdoor Unit		SRC13YXP-W6
Ton - Cooling Only	(minimum ~maximum)		1.0 ( 0.23 Ton ~ 1.05 Ton )
BEE Star Rating - 2025			3 Star
Compressor Type			Rotary
VFD - Variable Frequency Drive			Inverter Vector Control Technology for smooth waveform & higher efficiency
Minimum Compressor RPM			7 ~ 15 RPM - Using iPM (INTELLIGENT POWER MODULE)
Refrigerant Volume Control Using			Motorized Electronic Expansion Valve for Variable Refrigerant Flow
Room Temperature Control			Microcomputer Thermostat
Power Source			1 Phase, 220 / 230 / 240 V, 50 Hz
Maximum Cooling Capacity at**			12624
Rated Cooling Capacity at	100% Load	BTU/hr	12420
Rated Cooling Capacity at	50% Load		5971
Maximum Cooling Capacity at**	120% Load		3700
Rated Cooling Capacity at	100% Load	Watts	3640
Rated Cooling Capacity at	50% Load		1750
Rated Power Consumption at	100% Load		1070
Rated Power Consumption at	50% Load	watts	397
Rated EER / COP at	100% Load		3.4
Rated EER / COP at	50% Load		4.4
Rated Indian Seasonal Energy Efficiency		ISEER	4.2
Current ( Minimum ~ Maximum )**			0.70 ~ 5.0
Dimension (H x W x D)	Indoor Unit	mm	262 x 769 x 230
	Outdoor Unit	mm	540 x 645(+57) x 275
Net Weight	Indoor Unit	Kgs	7.5
	Outdoor Unit	Kgs	26.5
Cooling Coil Row	Indoor Unit	No.s	2
Air Flow (CMH)	Indoor Unit	m3/hr	700
Long Reach Air Flow Upto	Indoor Unit	Meters	5
Self Diagnosis Function	Indoor Unit		Yes
Sound Level (H/M/L)	Indoor Unit	dB	42 / 32 / 22
Louver Swing	Indoor Unit		2D ( UP & DOWN )
Special Filter	Indoor Unit		Anti Bacterial - Filter
Fan	Indoor Unit		Anti - Micro Bial Fan
DC Fan Motor Speed	Indoor Unit		Auto / Hi / Med / Low
Refrigerant			R32
Refrigerant Injection in Coil			3 Point - Multi Port
Refrigerant Piping Thickness:18Gauge(1mm)	Liquid Line	mm	6.35 ( 1/4" )
	Gas Line	mm	9.52 (3/8")
Main Power Supply to	Outdoor Unit		2.5 mm <sup>2</sup> x 3 cores (including Earthing)
Connecting wiring	B/w IDU & ODU		2.5 mm <sup>2</sup> x 4 cores (including Earthing)
Area Coverage ***		Sq.Meters	10 ~ 13.95

## Refrigerant Pipe Length

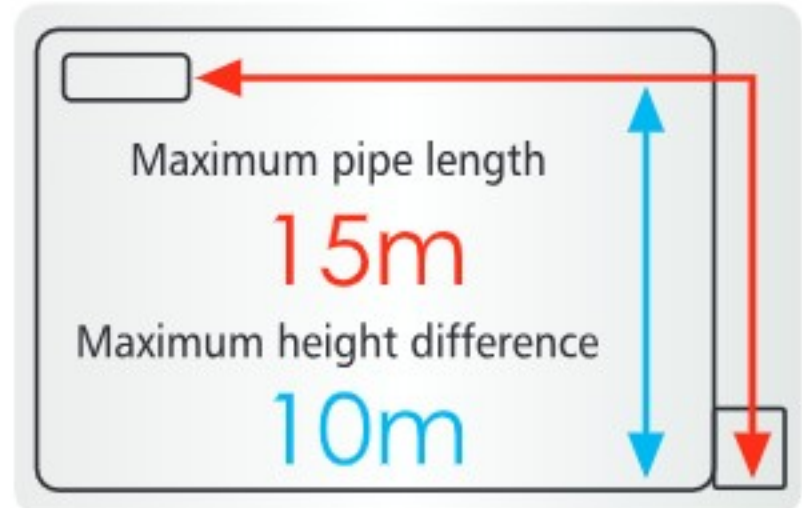

SRK13YXP-W6

## Remote Control



SRK13YXP-W6


\*\* Under Standard Installation & Lab Test Condition  
\*\*\* Customers need to seek guidance from the Authorized Dealer / Expert for the AC unit capacity selection before ordering any AC unit. Area coverage is subject to checking of the site conditions like - Terrace / Wall / Glass windows exposed to direct sunlight, of the area to be Air- conditioned & room temperature requirement & outdoor temperature conditions. Company will not be responsible if there will be cooling issues due to improper selection of capacity of the AC units.

ISEER = INDIAN SEASONAL ENERGY EFFICIENCY RATIO



# Hyper Inverter

Cooling Only

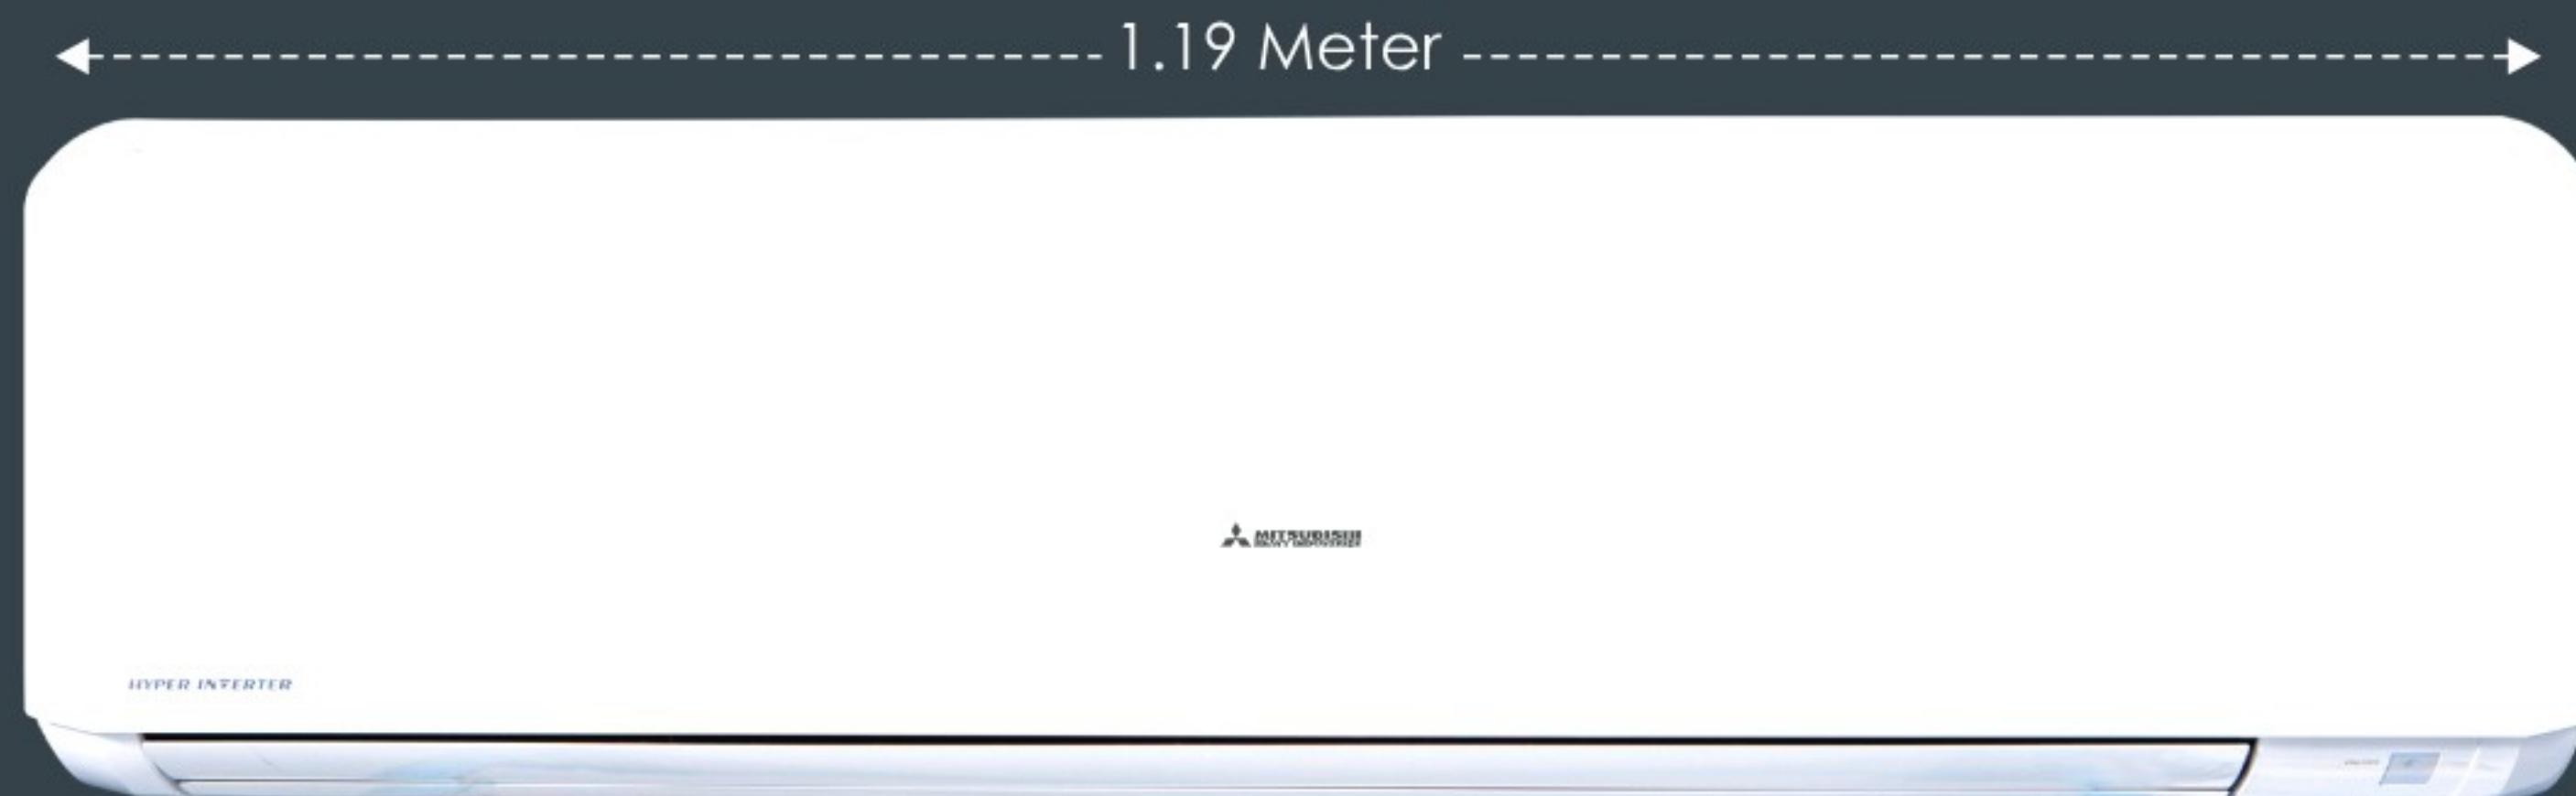

SRK24YVS-W6 2.2 Ton ( 0.65 Ton ~ 2.36 Ton )



SRK13YXS-W6 1.1 Ton ( 0.25 Ton ~ 1.25 Ton )



SURROUND COOLING



**LONG REACH AIR FLOW**

Powerful air flow is realized by Jet technology. Good for large living rooms and shops. Increase your comfort.

SRK24YVS-W6 (2.2 Ton)

18.2 METERS\*\*



\*\*under Standard Installation & Lab Test Conditions & In Comparison To A Non Star Rated Air Conditioners




# Specifications



## ECO SMART - HYPER INVERTER (R32) - COOLING ONLY

MODEL	Unit		SRK13YXS-W6	SRK24YVS-W6
	Indoor Unit		SRK13YXS-W6	SRK24YVS-W6
	Outdoor Unit		SRC13YXS-W6	SRC24YVS-W6
Ton - Cooling Only	(minimum ~maximum)		<b>1.1 ( 0.25 Ton ~ 1.2 Ton )</b>	<b>2.2 ( 0.65 Ton ~ 2.36 Ton )</b>
BEE Star Rating - 2025			5 Star	5 Star
Super Tropical Compressor Type			Rotary	Twin Rotary
VFD - Variable Frequency Drive			Inverter Vector Control Technology for smooth waveform & higher efficiency	
Minimum Compressor RPM			7 ~ 15 RPM - Using iPM (INTELLIGENT POWER MODULE)	
Refrigerant Volume Control Using			Motorized Electronic Expansion Valve for Variable Refrigerant Flow	
Room Temperature Control			Microcomputer Thermostat	
Power Source			1 Phase, 220 / 230 / 240 V, 50 Hz	
Maximum Cooling Capacity **	120% Load	BTU/hr	14330	28320
Rated Cooling Capacity at	100% Load		13000	26272
Rated Cooling Capacity at	50% Load		6517	13477
Maximum Cooling Capacity **	120% Load	Watts	4200	8300
Rated Cooling Capacity at	100% Load		3810	7700
Rated Cooling Capacity at	50% Load		1910	3950
Rated Power Consumption at	100% Load	watts	1000	1800
Rated Power Consumption at	50% Load		332	690
Rated EER	100% Load	W/w	3.8	4.3
Rated EER	50% Load		5.8	5.7
Rated Indian Seasonal Energy Efficiency		ISEER	5.1	5.41
Current (minimum ~maximum)**		A	0.70 ~ 4.8	1.5 ~ 8.5
Dimension (H x W x D)	Indoor Unit	mm	290 x 870 x 230	339 x 1197 x 262
	Outdoor Unit	mm	540 x 645(+57) x 275	750 x 880(+88) x 340
Net Weight	Indoor Unit	Kgs	10.0	15.5
	Outdoor Unit	Kgs	27	58
Cooling Coil Row	Indoor Unit	No.s	2	3
Air Flow	Indoor Unit	CMH	850	1450
Long Reach Air Flow Upto	Indoor Unit	Meters	5.18	18.28
Self Diagnosis Function	Indoor Unit		Yes	Yes
Sound Level (H/M/L/Ulo)	Indoor Unit	dB	41 / 35 / 29 / 19(Ulo)	43 / 40 / 36 / 24 (U-low)
Louver Swing	Indoor Unit		3D + 3D AUTO Controlled By Micro Processor	
Special Filter	Indoor Unit		Enzyme + Solar (Deodorising Filter) + Anti Bacterial - Filters	
Blower Fan	Indoor Unit		Anti - Micro Bial Fan	
DC Fan Motor Speed	Indoor Unit		Auto / P Hi / High / Med / Low / Ulo ( Silent Mode)	
Refrigerant			R32	R32
Refrigerant Piping Thickness:18Gauge	Liquid Line	mm	6.35 (1/4")	6.35 ( 1/4" )
	Gas Line	mm	9.52 (3/8")	15.88 ( 5/8" )
Main Power Supply to	Outdoor Unit		2.5 mm <sup>2</sup> x 3 cores (with Earthing Cable)	
Connecting wiring	B/w IDU & ODU		2.5 mm <sup>2</sup> x 4 cores (with Earthing Cable)	
Area Coverage ***		Sq. Meters	12 ~ 15.79	27.8 ~ 41.8

## Refrigerant Pipe Length

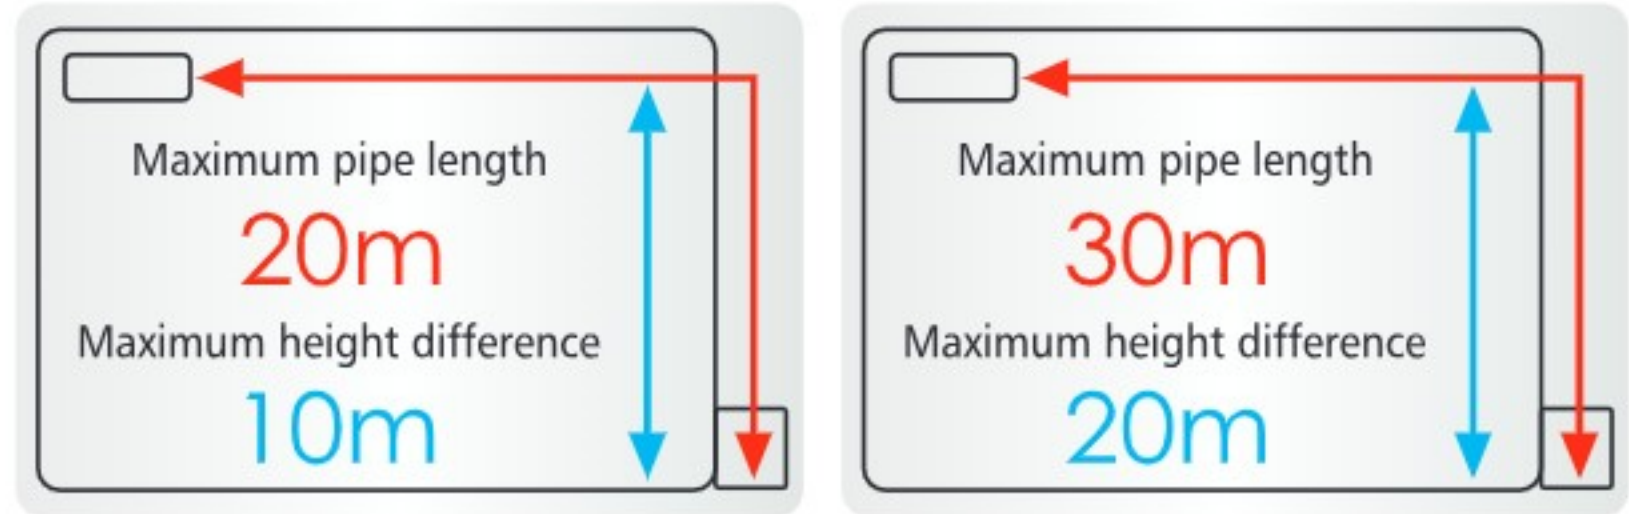

SRK13YXS-W6

SRK24YVS-W6

## Remote Control



SRK13YXS-W6 /  
SRK24YVS-W6

\*\* Under Standard Installation & Lab Test Condition  
\*\*\* Customers need to seek guidance from the Authorized Dealer / Expert for the AC unit capacity selection before ordering any AC unit. Area coverage is subject to checking of the site conditions like - Terrace / Wall / Glass windows exposed to direct sunlight, of the area to be Air- conditioned & room temperature requirement & outdoor temperature conditions. Company will not be responsible if there will be cooling issues due to improper selection of capacity of the AC units.  
**ISEER = INDIAN SEASONAL ENERGY EFFICIENCY RATIO**



# Hyper Inverter With Clean AIR Cooling Only




**SRK20YYM-W6**  
1.8 ( 0.37 Ton ~ 1.90 Ton )

**NEW**



## Features

### Comfortable Air Flow Functions

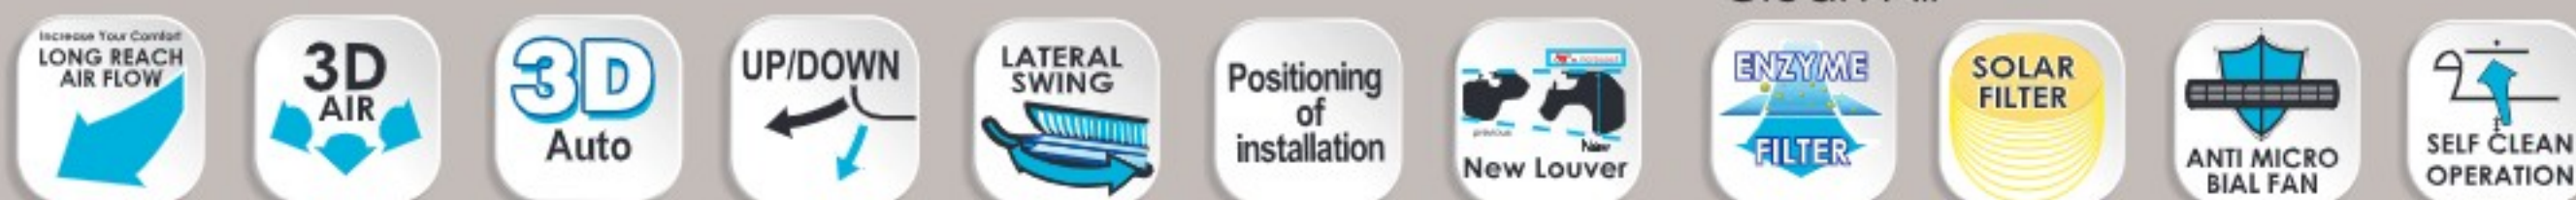

### Comfortable Function



### Convenient & Economy Functions



### Maintenance



### Others




**SURROUND COOLING**



## Nano Air Filter

It has the ability to filter the small particles ( PM 2.5 )  
Reduce the contamination of small dust in the room.

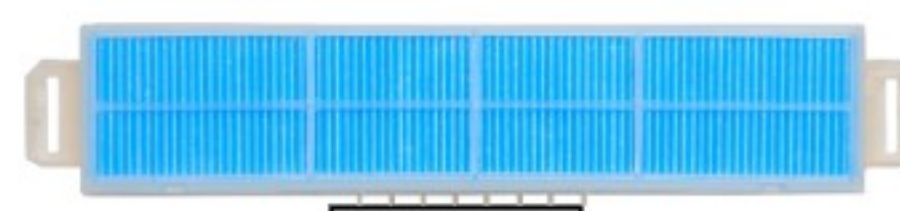

Nano Air Filter

**PM 2.5 Filtration**



## Anti Allergen Filter



**Anti-Allergen + Activated Carbon**




## Activated Carbon Filter

Combining two powers to purify the air with filter technology to stop allergens and absorb toxic gases and dust in the air.

**Absorbs harmful gases**



## Refrigerant Pipe Length

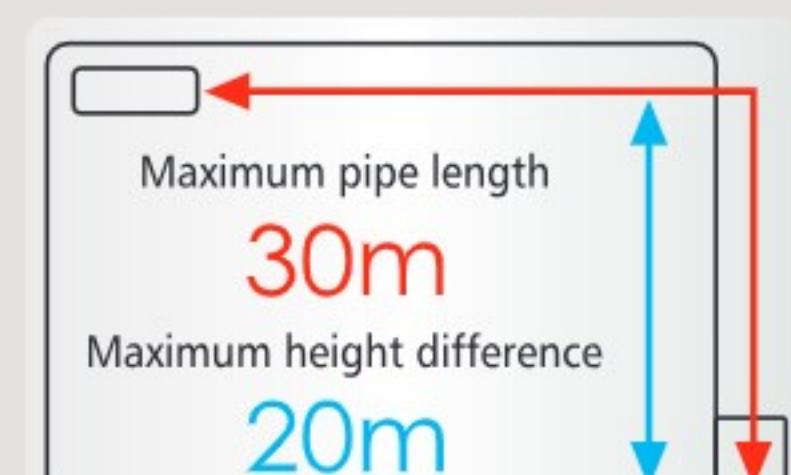

**SRK20YYM-W6**

## WiFi - Control Function (Optional)

### System configuration



### Mobile Application



### Interface Kit

Search for "Smart M-Air" from the GooglePlay™ store for Android™ and AppStore for iPhone.

Application compatible model: Android™ OS 8-12 smartphones and tablets, iPhone for iOS 12-15




\*\*under Standard Installation & Lab Test Conditions and in Comparison To A Non Star Rated Air Conditioners




SPECIFICATIONS		HYPER INVERTER ( R32 ) - COOLING ONLY	
Unit		SRK20YYM-W6	
MODEL	Indoor Unit	SRK20YYM-W6	
	Outdoor Unit	SRC20YYM-W6	
Ton - Cooling Only	(minimum ~ maximum)	1.8 ( 0.37Ton ~ 1.90Ton )	
BEE STAR RATING - 2025		5 Star	
Super Tropical Compressor Type		Twin Rotary	
VFD - Variable Frequency Drive		Inverter Vector Control Technology for smooth waveform & higher efficiency	
Minimum Compressor RPM		7 ~ 15 RPM - Using iPM (INTELLIGENT POWER MODULE)	
Refrigerant Volume Control Using		Motorized Electronic Expansion Valve for Variable Refrigerant Flow	
Room Temperature Control		Microcomputer Thermostat	
Power Source		1 Phase, 220 / 230 V, 50 Hz	
Maximum Cooling Capacity **		22799	
Rated Cooling Capacity ( 100% Load )		22110	
Rated Cooling Capacity ( 50% Load )		11011	
Maximum Cooling Capacity **		6682	
Rated Cooling Capacity ( 100% Load )		6480	
Rated Cooling Capacity ( 50% Load )		3227	
Rated Power Consumption (100% Full Load)		1570	
Rated Power Consumption ( 50% Half Load)		592	
Rated EER (100% Load )		4.1	
Rated EER ( 50% Load )		5.5	
Rated Indian Seasonal Energy Efficiency Ratio		ISEER	
Current ( minimum ~ maximum ) **		0.70 ~ 7.5	
Dimension (H x W x D)	Indoor Unit	mm	294 x 998 x 230
	Outdoor Unit	mm	640 x 800(+71) x 290
Weight	Indoor Unit	Kgs	11.5
	Outdoor Unit	Kgs	38.5
Cooling Coil Row		No.s	2
Air Flow		CMH	1350
Long Reach Airflow Upto		Meters	15
Self Diagnosis Function		Yes	
Sound Level (H/M/L/Ulo)		dB	48 / 39 / 30 / Ulo 21
Louver Swing		3D + 3D AUTO - Controlled by microprocessor & Room Temperature Sensor	
Special Filter		Nano Air Filter x 1 no. + Anti Allergen & Activated Carbon Filter x 1 no.	
Blower Fan		Anti - Microbial Fan	
DC Fan Motor Speed		Auto / Powerful / High / Medium / Low / Ulo	
Refrigerant		R32	
Refrigerant Piping Thickness: 18Gauge (1mm)	Liquid Line	mm	6.35 (1/4")
	Gas Line	mm	12.7 (1/2")
Main Power Supply to		2.5 mm2 x 3 cores (with Earthing Cable)	
Connecting wiring		2.5 mm2 x 4 cores (with Earthing Cable)	
Area Coverage***		Sq.mtrs	18.58 ~ 26




## Refrigerant Pipe Length

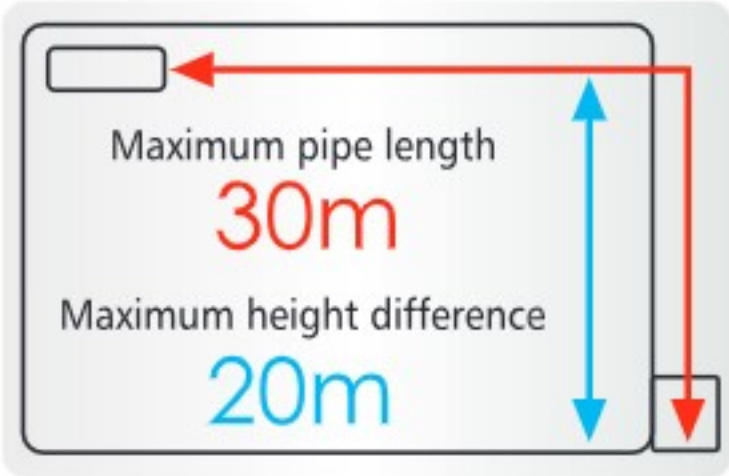

SRK24YYS-W6

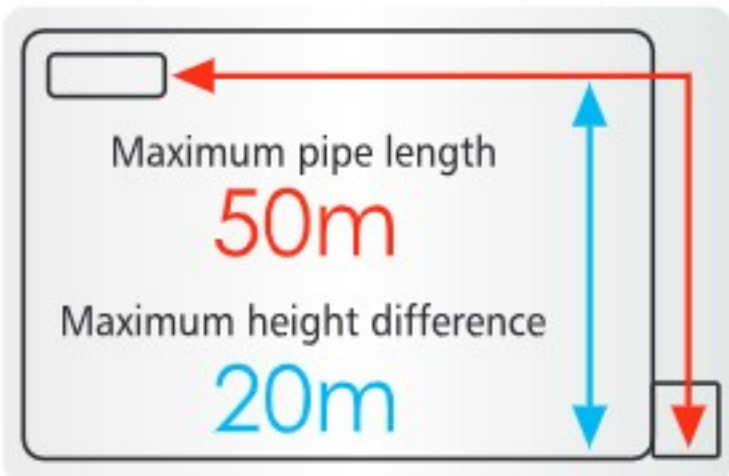

SRK100YA-W6

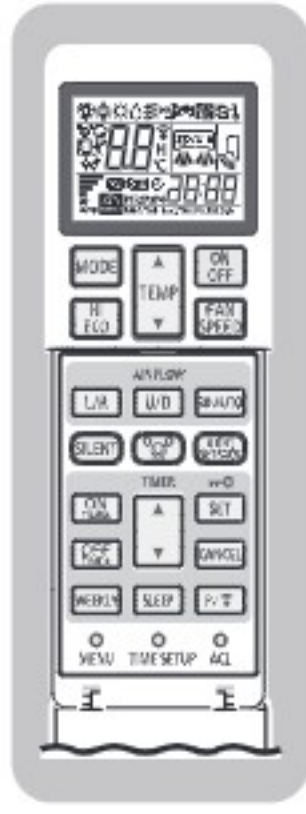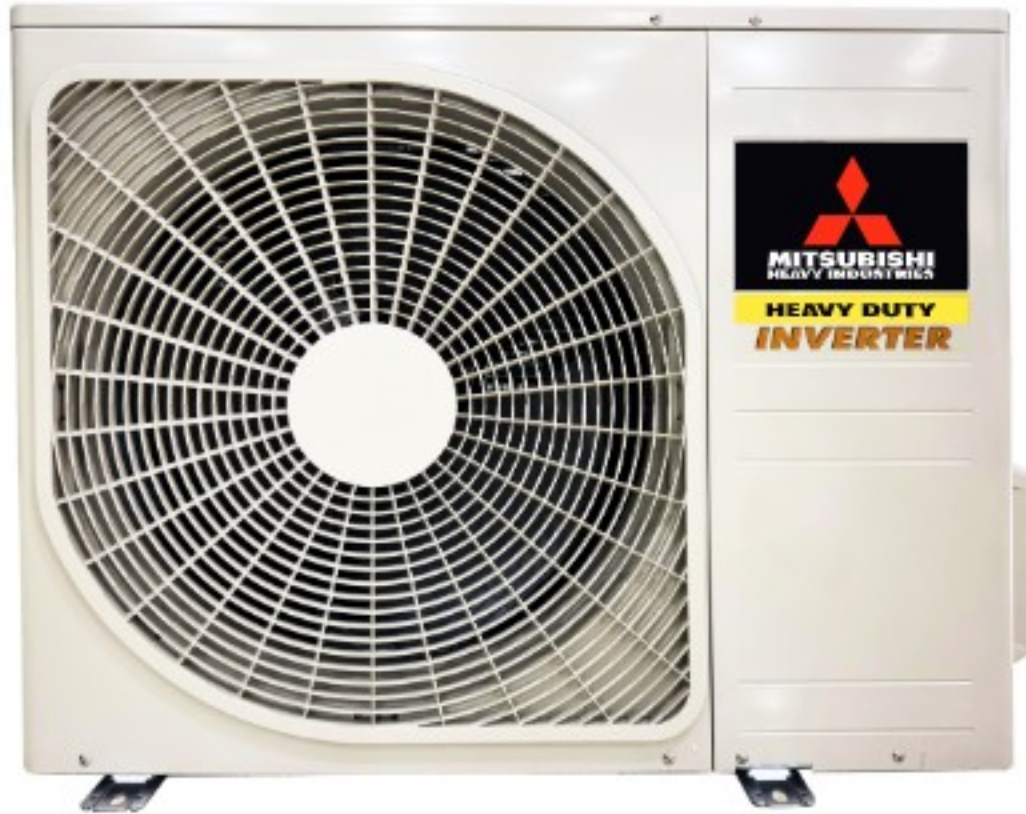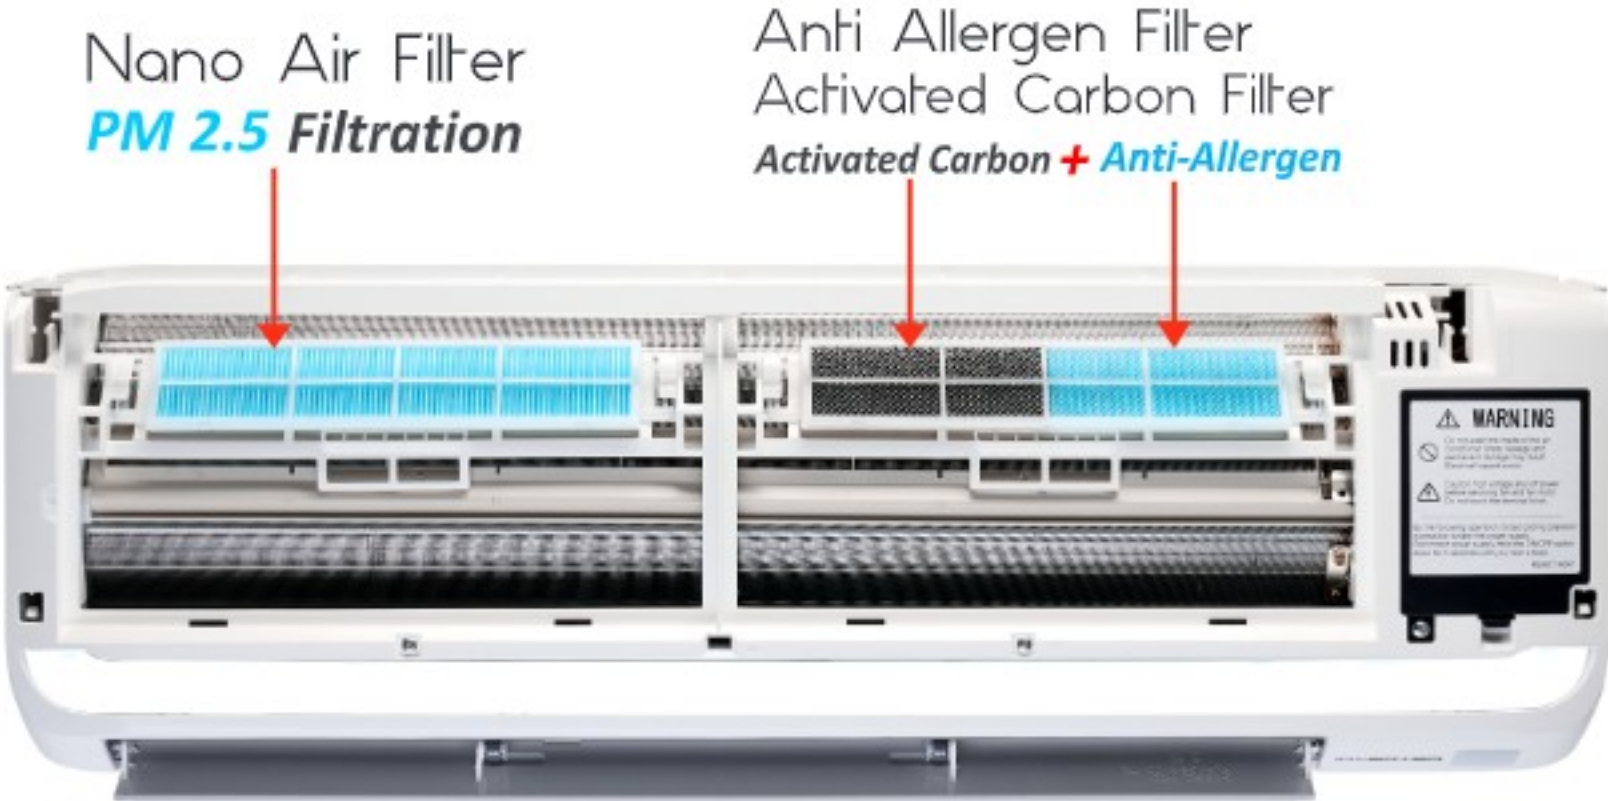

### ANTI- CORROSIVE BLUE FIN CONDENSER COIL

- Enhanced Durability:** The special anti-corrosion coating on the heat exchanger protects the coils from harsh climates, moisture, and humidity, extending the lifespan of the AC.
- Protection from Corrosion:** The blue fin coating shields the condenser coils from corrosive elements like salty air in coastal areas, preventing damage and maintaining efficiency.
- Improved Efficiency:** By preventing the accumulation of salt and deposition of acid, the blue-coated condenser fins help maintain optimal performance and efficiency.
- Long-Term Reliability:** The anti-corrosive coating ensures the coils remain in good condition, reducing the need for repairs and replacements over time.
- 30% Extra Extended Condenser Coil Area for better Cooling & Energy Efficiency**

\*\* Under Standard Installation & Lab Test Condition  
\*\*\* Customers need to seek guidance from the Authorized Dealer / Expert for the AC unit capacity selection before ordering any AC unit. Area coverage is subject to checking of the site conditions like - Terrace / Wall / Glass windows exposed to direct sunlight, of the area to be Air- conditioned & room temperature requirement & outdoor temperature conditions. Company will not be responsible if there will be cooling issues due to improper selection of capacity of the AC units.  
**ISEER = INDIAN SEASONAL ENERGY EFFICIENCY RATIO**



# Hyper Inverter With Clean AIR Cooling Only

YYM Series



←----- 1 Mtr -----→



SRK<sub>24YYM-W6 2.1</sub> ( 0.37 Ton ~ 2.2 Ton )



←----- 0.80 Mtr -----→





SRK<sub>13YYM-W6 1.0</sub> ( 0.25 Ton ~ 1.1 Ton )



## Nano Air Filter

It has the ability to filter the small particles ( PM 2.5 )  
Reduce the contamination of small dust in the room.

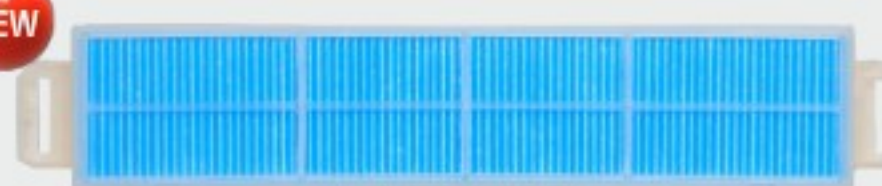

Nano Air Filter

PM 2.5 Filtration



## Anti Allergen Filter




Anti-Allergen + Activated Carbon



## Activated Carbon Filter

Combining two powers to purify the air with filter technology to stop allergens and absorb toxic gases and dust in the air.

Absorbs harmful gases

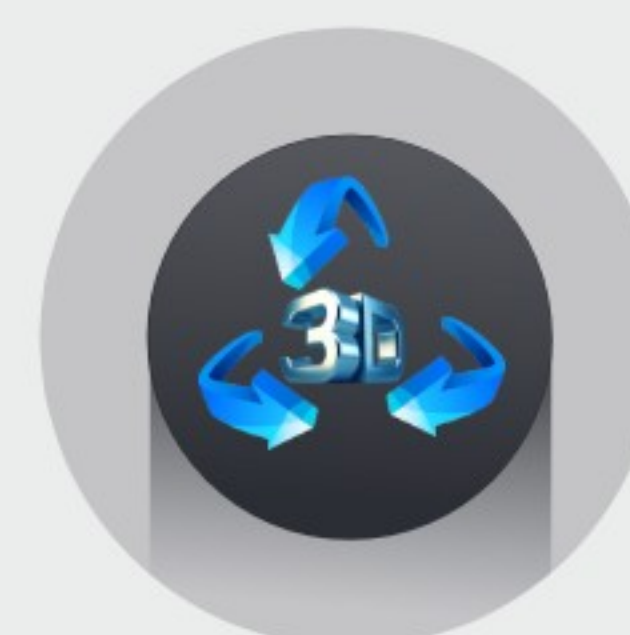

SURROUND COOLING

## WiFi - Control Function (Optional)



### System configuration



### Mobile Application



Search for "Smart M-Air" from the GooglePlay™ store for Android™ and AppStore for iPhone.

Application compatible model: Android™ OS 8-12 smartphones and tablets, iPhone for iOS 12-15

## InterFace Kit



\*\*under Standard Installation & Lab Test Conditions & In Comparison To A Non Star Rated Air Conditioners




# Specifications




SPECIFICATIONS			ECO SMART - HYPER INVERTER ( R32 ) - COOLING ONLY	
	Unit		SRK13YYM-W6	SRK24YYM-W6
MODEL	Indoor Unit		SRK13YYM-W6	SRK24YYM-W6
	Outdoor Unit		SRC13YYM-W6	SRC24YYM-W6
Ton - Cooling Only	(minimum ~ maximum)		<b>1.0 ( 0.25 Ton ~ 1.1 Ton )</b>	<b>2.1 ( 0.37 Ton ~ 2.2Ton )</b>
BEE STAR RATING - 2025			3 Star	4 Star
Super Tropical Compressor Type			Rotary	Twin Rotary
VFD - Variable Frequency Drive			Inverter Vector Control Technology for smooth waveform & higher efficiency	
Minimum Compressor RPM			7 ~ 15 RPM - Using iPM (INTELLIGENT POWER MODULE)	
Refrigerant Volume Control Using			Motorized Electronic Expansion Valve for Variable Refrigerant Flow	
Room Temperature Control			Microcomputer Thermostat	
Power Source			1 Phase, 220 / 230 / 240 V, 50 Hz	
Maximum Cooling Capacity **	BTU/hr		12625	25931
Rated Cooling Capacity ( 100% Load )			12027	25436
Rated Cooling Capacity ( 50% Load )			5787	11567
Maximum Cooling Capacity **	Watts		3700	7600
Rated Cooling Capacity ( 100% Load )			3525	7455
Rated Cooling Capacity ( 50% Load )			1696	3390
Rated Power Consumption (100% Full Load)	watts		1180	2280
Rated Power Consumption ( 50% Half Load)			316	612
Rated EER (100% Load )	W/w		3.0	3.3
Rated EER ( 50% Load )			5.4	5.5
Rated Indian Seasonal Energy Efficiency Ratio	ISEER		4.39	4.67
Current ( minimum ~ maximum ) **	A		0.50 ~ 5.5	1 ~ 10.5
Dimension (H x W x D)	Indoor Unit	mm	294 x 798 x 210	294 x 998 x 230
	Outdoor Unit	mm	540 x 645(+57) x 275	640 x 800(+71) x 290
Weight	Indoor Unit	Kgs	9.5	11.5
	Outdoor Unit	Kgs	23.5	38.5
Cooling Coil Row	Indoor Unit	No.s	2	2
Air Flow	Indoor Unit	CMH	760	1300
Long Reach Airflow Upto	Indoor Unit	Meters	4	15.25
Self Diagnosis Function	Indoor Unit		Yes	Yes
Sound Level (H/M/L/Ulo)	Indoor Unit	dB	41 / 33 / 26 / Ulo 20	48 / 39 / 30 / Ulo 21
Louver Swing	Indoor Unit		3D + 3D AUTO Controlled by Micro Processor	
Special Filter	Indoor Unit		Nano Filter + (Anti Allergen Filter + Activated Carbon ) Filter	
Blower Fan	Indoor Unit		Anti - Micro Biol Fan	
DC Fan Motor Speed	Indoor Unit		Auto / Powerful / High / Medium / Low / Ulo	
Refrigerant			R32	R32
Refrigerant Piping Thickness: 18Gauge (1mm)	Liquid Line	mm	6.35 (1/4")	6.35 (1/4")
	Gas Line	mm	9.52 (3/8")	12.7 (1/2")
Main Power Supply to	Outdoor Unit		2.5 mm2 x 3 cores (with Earthing Cable)	
Connecting wiring	B/w IOU & ODU		2.5 mm2 x 4 cores (with Earthing Cable)	
Area Coverage***		Sq.Meters	10 ~ 15.8	26 ~ 30.20

## Refrigerant Pipe Length

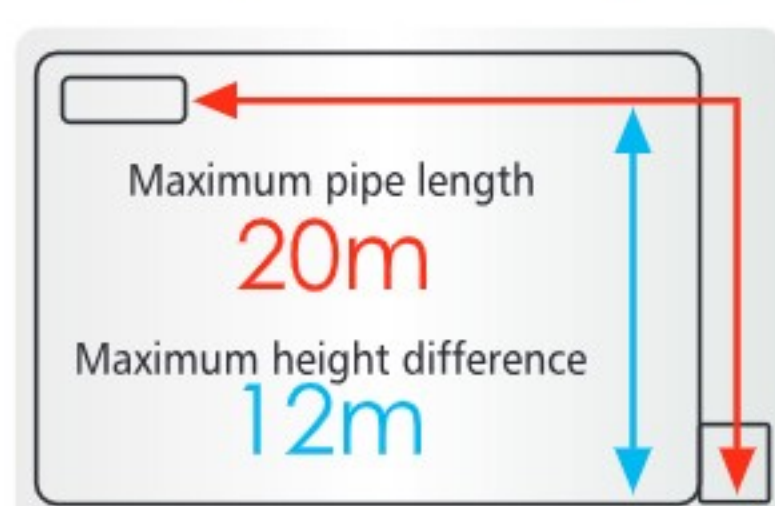

SRK13YYM-W6

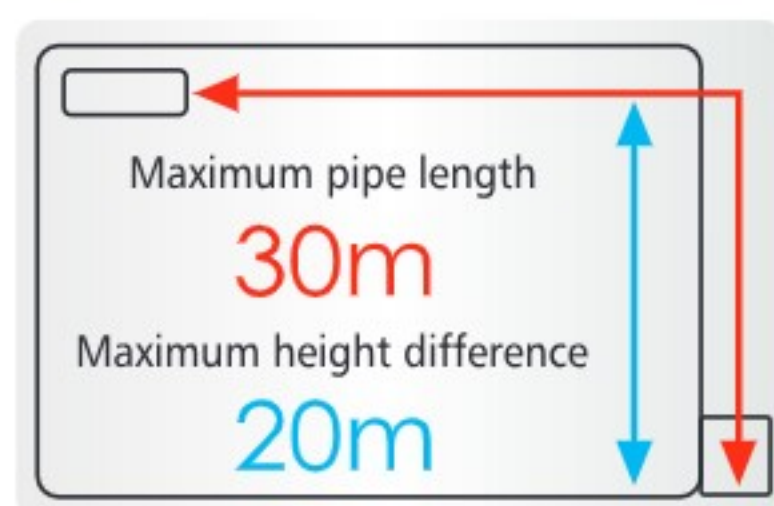

SRK24YYM-W6

## Remote Control



SRK13YYM



SRK24YYM


\*\* Under Standard Installation & Lab Test Condition

\*\*\* Customers need to seek guidance from the Authorized Dealer / Expert for the AC unit capacity selection before ordering any AC unit. Area coverage is subject to checking of the site conditions like - Terrace / Wall / Glass windows exposed to direct sunlight, of the area to be Air- conditioned & room temperature requirement & outdoor temperature conditions. Company will not be responsible if there will be cooling issues due to improper selection of capacity of the AC units.


**ISEER = INDIAN SEASONAL ENERGY EFFICIENCY RATIO**



# Hyper Inverter With Clean AIR Cooling Only

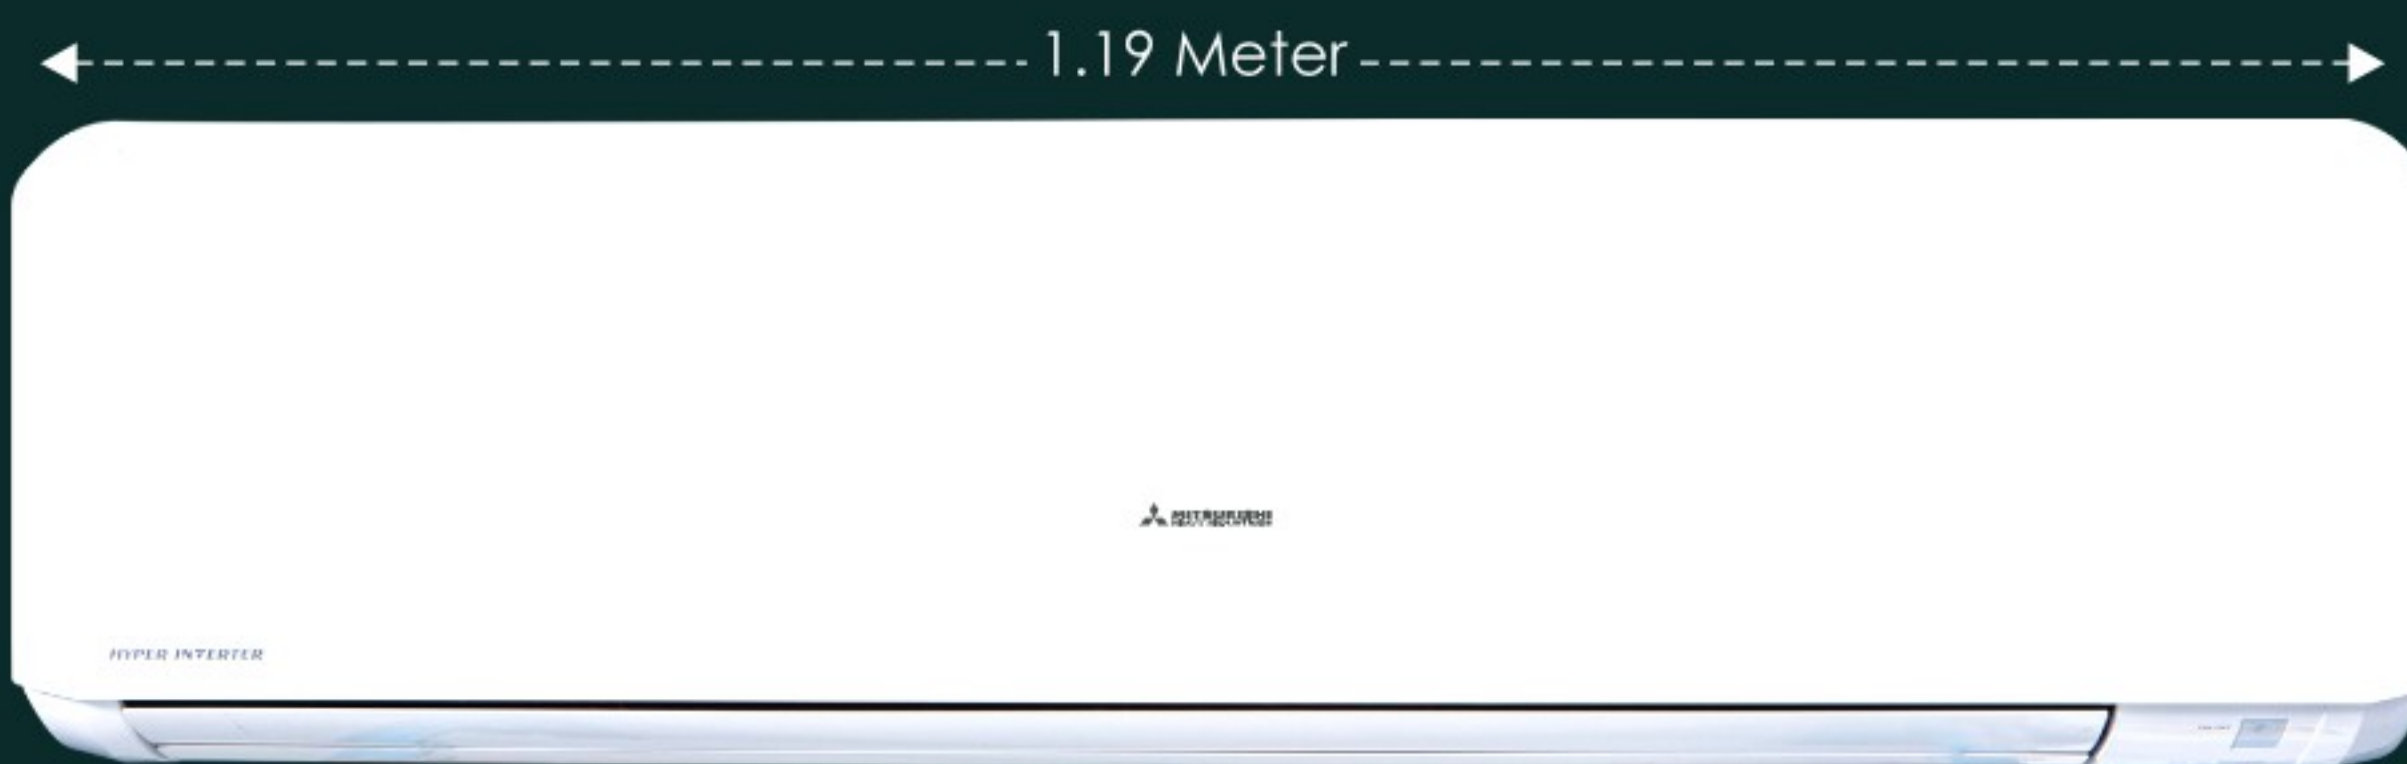

SRK 100YA-W6 3.0 ( 0.56 Ton ~ 3.12 Ton )

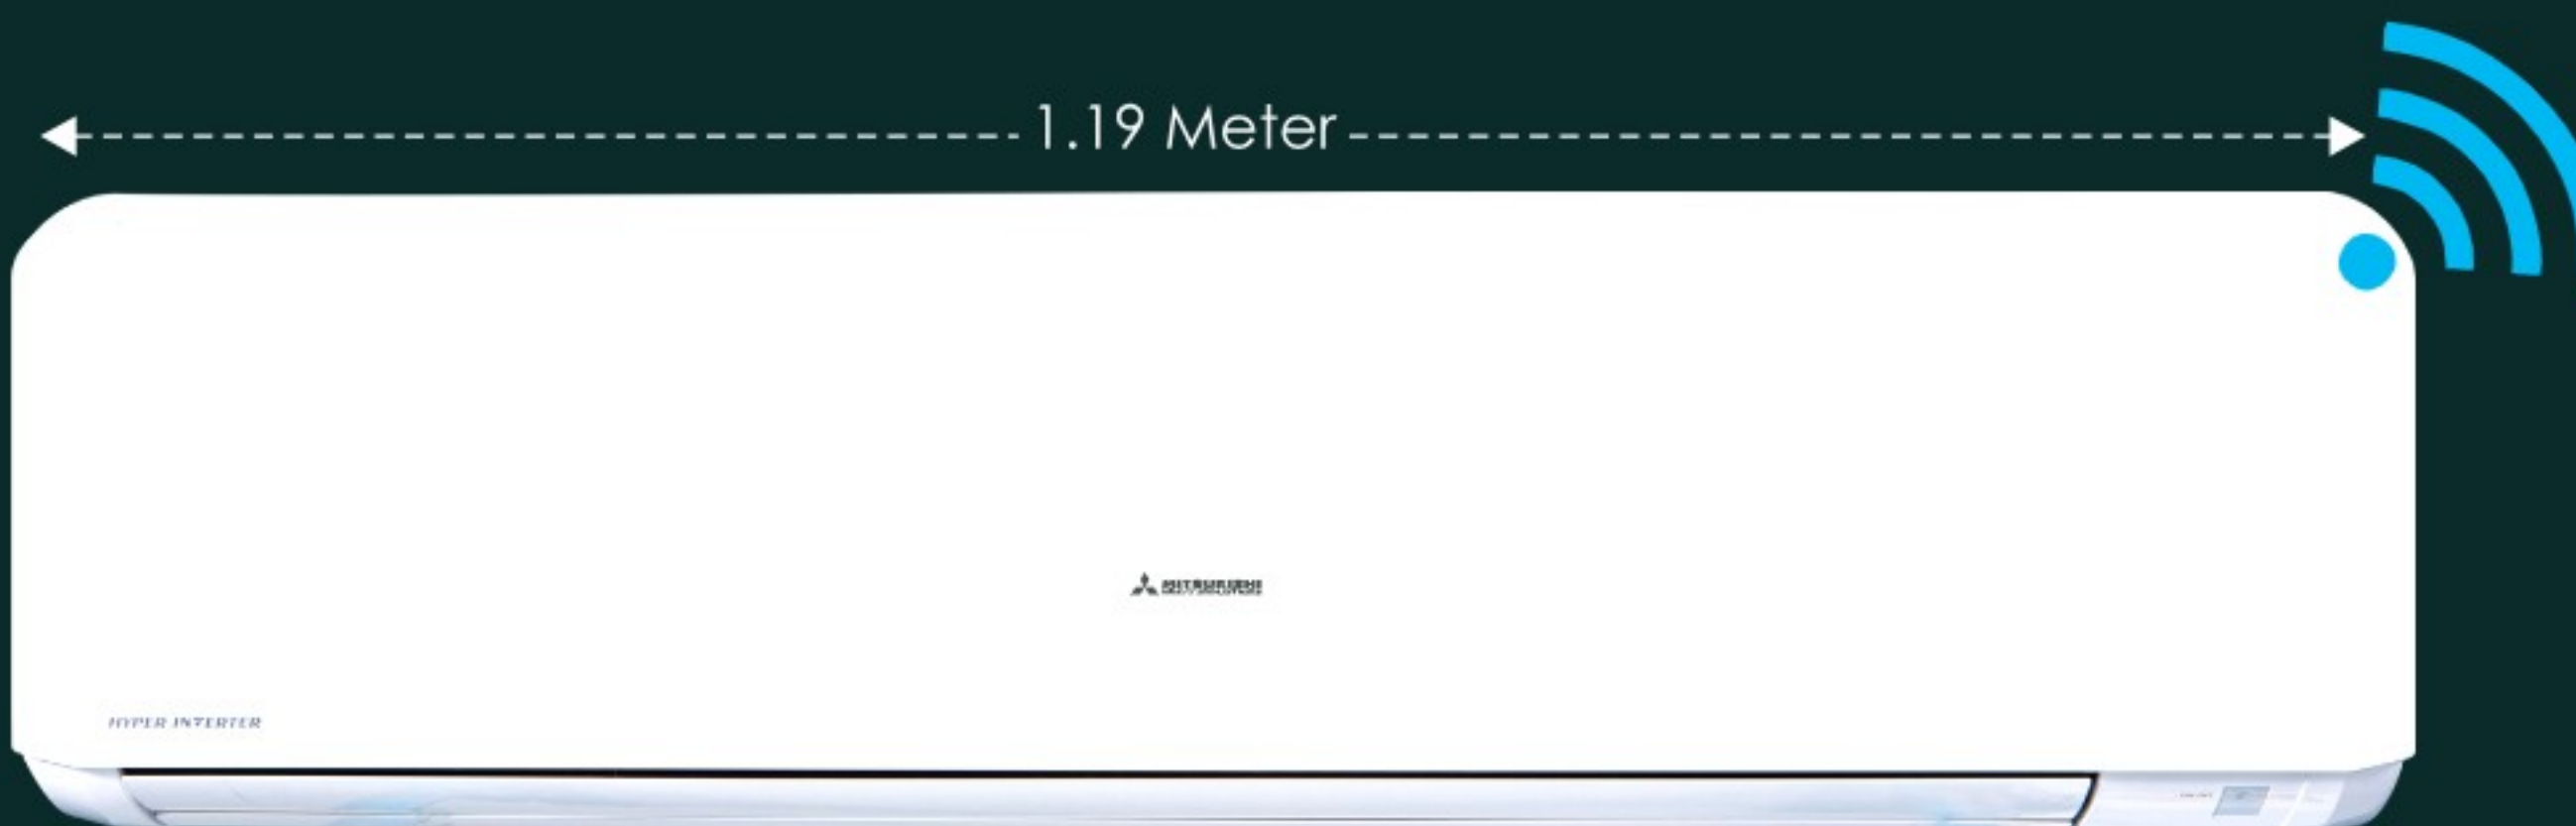

SRK 24YYS-W6 2.2 ( 0.25 Ton ~ 2.44 Ton )



In- Built Wi-Fi Control



SURROUND COOLING



Nano Air Filter

It has the ability to filter the small particles ( PM 2.5 )  
Reduce the contamination of small dust in the room.




Anti Allergen Filter



Activated Carbon Filter

Combining two powers to purify the air with filter technology to stop allergens and absorb toxic gases and dust in the air.

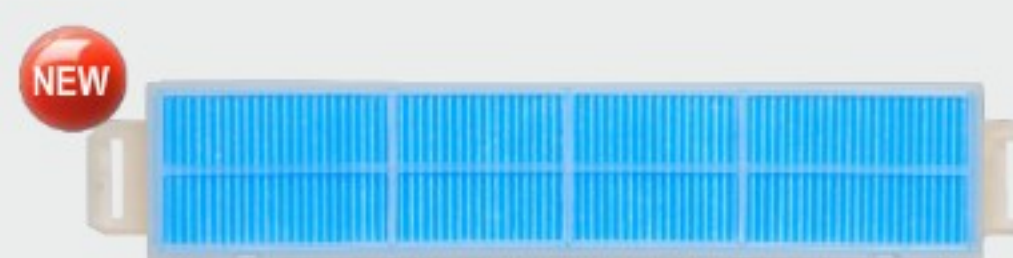


Nano Air Filter

PM 2.5 Filtration



Anti-Allergen + Activated Carbon

Absorbs harmful gases

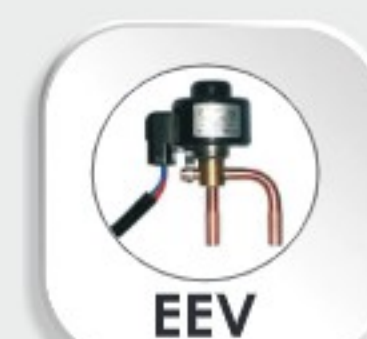

\*\*under Standard Installation & Lab Test Conditions & In Comparison To A Non Star Rated Air Conditioners



# Specifications



SPECIFICATIONS			ECO SMART - HYPER INVERTER ( R32 ) - COOLING ONLY	ECO SMART - HYPER INVERTER ( R32 ) - COOLING ONLY
	Unit		<b>SRK24YYS-W6 ( WIFI MODEL )</b>	<b>SRK100YA-W6</b>
MODEL	Indoor Unit		SRK24YYS-W6	SRK100YA-W6
	Outdoor Unit		SRC24YYS-W6	FDC100YNA-W6
Ton - Cooling Only	(minimum ~ maximum)		2.2 ( 0.25Ton ~ 2.44Ton )	3.0 ( 0.56Ton ~ 3.12Ton )
BEE STAR RATING - 2025			5 Star	4 Star
Super Tropical Compressor Type			Twin Rotary	Twin Rotary
VFD - Variable Frequency Drive			Inverter Vector Control Technology for smooth waveform & higher efficiency	
Minimum Compressor RPM			7 ~ 15 RPM - Using iPM (INTELLIGENT POWER MODULE)	
Refrigerant Volume Control Using			Motorized Electronic Expansion Valve for Variable Refrigerant Flow	
Room Temperature Control			Microcomputer Thermostat	
Power Source			1 Phase, 220 / 230 / 240 V, 50 Hz	
Maximum Cooling Capacity ** ( 120% Load )			29343	37532
Rated Cooling Capacity ( 100% Load )	BTU/hr		25931	35533
Rated Cooling Capacity ( 50% Load )			12744	18425
Maximum Cooling Capacity **			8600	11000
Rated Cooling Capacity ( 100% Load )	Watts		7600	10414
Rated Cooling Capacity ( 50% Load )			3735	5400
Rated Power Consumption (100% Full Load)			1850	2900
Rated Power Consumption ( 50% Half Load)	watts		592	1000
Rated EER ( 100% Load )			4.1	3.6
Rated EER ( 50% Load )	W/w		6.3	5.4
Rated Indian Seasonal Energy Efficiency Ratio	ISEER		5.55	4.85
Current ( minimum ~ maximum ) **	A		0.83 ~ 8.3	1.0 ~ 13.2
Dimension (H x W x D)	Indoor Unit	mm	339 x 1197 x 262	339 x 1197 x 262
	Outdoor Unit	mm	750 x 880 (+88) x 340	750 x 880 (+88) x 340
Weight	Indoor Unit	Kgs	16.5	16.5
	Outdoor Unit	Kgs	50.5	51.0
Cooling Coil Row	Indoor Unit	No.s	3	3
Air Flow	Indoor Unit	CMH	1368	1600
Long Reach Airflow Upto	Indoor Unit	Meters	17	20
Self Diagnosis Function	Indoor Unit		Yes	Yes
Sound Level (H/M/L/Ulo)	Indoor Unit	dB	46 / 42 / 37 / Ulo 23	47 / 43 / 38 / Ulo 27
Louver Swing	Indoor Unit		3D + 3D AUTO Controlled by Micro Processor	3D + 3D AUTO Controlled by Micro Processor
Special Filter	Indoor Unit		Nano PM 2.5 / Anti Allergen + Activated Carbon Filters	Enzyme + Sun ( Photocatalytic washable Deodorizing ) + Anti Bacterial Filter
Blower Fan	Indoor Unit		Anti - Micro Biol Fan	Anti - Micro Biol Fan
DC Fan Motor Speed	Indoor Unit		Auto / Powerful / High / Medium / Low / Ulo	Auto / Powerful / High / Medium / Low / Ulo
Refrigerant			R32	R32
Refrigerant Piping Thickness: 18Gauge (1mm)	Liquid Line	mm	6.35 ( 1/4" )	Indoor Unit = 9.52 ( 3/8" ) / Pipe = 6.35 ( 1/4" ) / Outdoor Unit = 6.35 ( 1/4" ) / ( Reducer Provided )
	Gas Line	mm	12.7 ( 1/2" )	15.88 ( 5/8" )
Main Power Supply to	Outdoor Unit		2.5 mm2 x 3 cores (with Earthing Cable)	4.0 mm2 x 3 cores (with Earthing Cable)
Connecting wiring	B/w IOU & ODU		2.5 mm2 x 4 cores (with Earthing Cable)	2.5 mm2 x 4 cores (with Earthing Cable)
Area Coverage***	Sq.Meters		27.8 ~ 41.8	41.80 ~ 55.74

## WiFi - Control Function

### System Configuration

In- Built Wi-Fi Control

Smartphone Tablet

Internet

Router


Search for "Smart M-Air" from the GooglePlay™ store for Android™ and AppStore for iPhone.

ANDROID APP ON Google play


Available on the App Store

Application compatible model: Android™ OS 8-12 smartphones and tablets, iPhone for iOS 12-15

\*SC-BIKN2-E cannot be used simultaneously for system configuration.

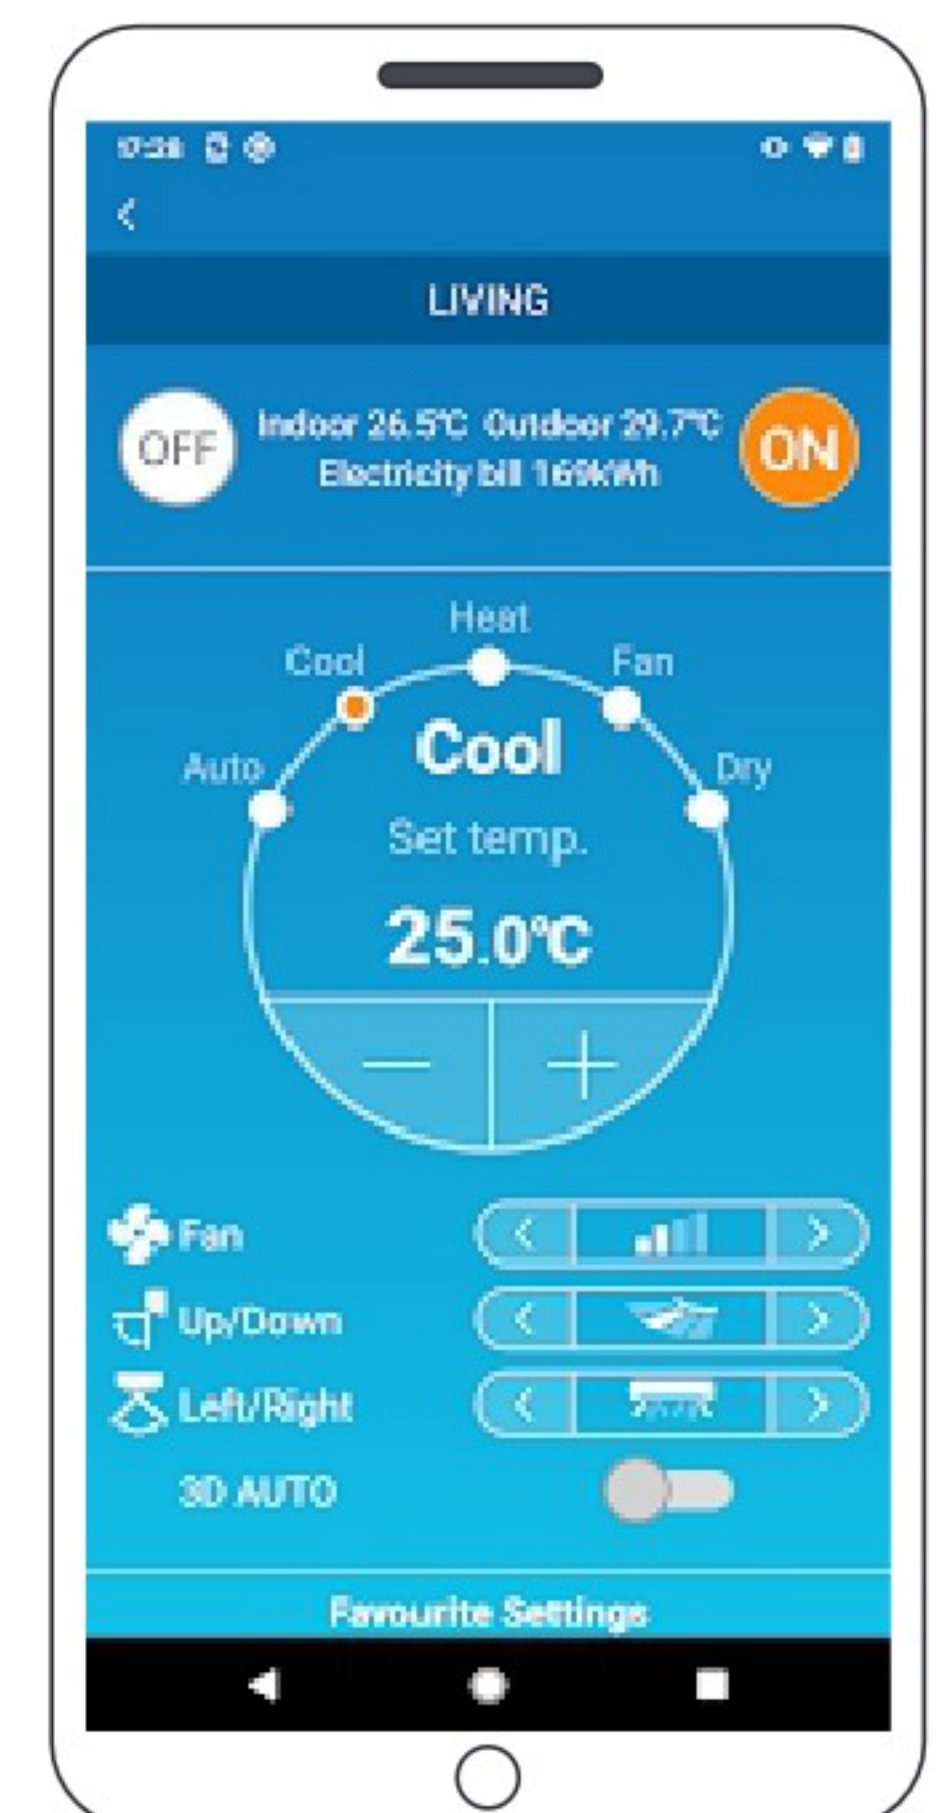

## Refrigerant Pipe Length

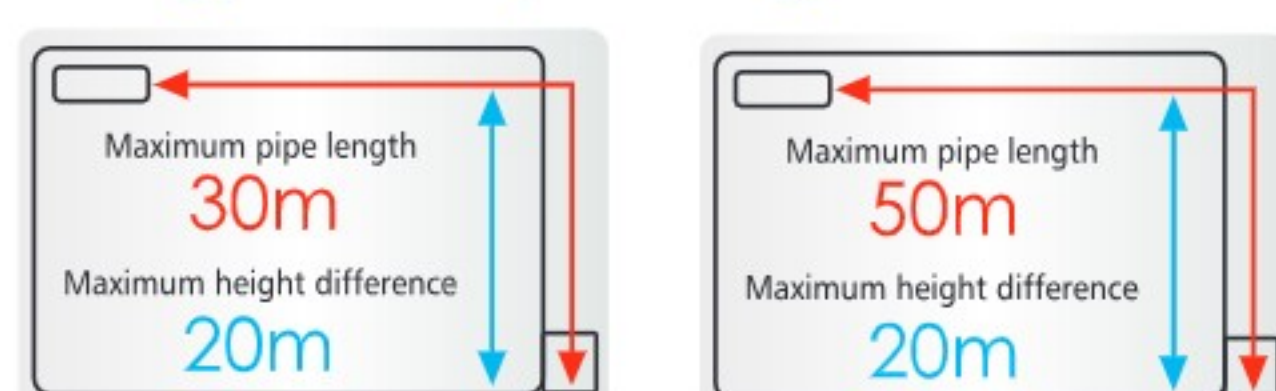

SRK24YYS-W6

SRK100YA-W6



SRK24YYS-W6  
MODELS ONLY



SRC24YYS-W6

\*\* Under Standard Installation & Lab Test Condition

\*\*\* Customers need to seek guidance from the Authorized Dealer / Expert for the AC unit capacity selection before ordering any AC unit. Area coverage is subject to checking of the site conditions like - Terrace / Wall / Glass windows exposed to direct sunlight, of the area to be Air- conditioned & room temperature requirement & outdoor temperature conditions. Company will not be responsible if there will be cooling issues due to improper selection of capacity of the AC units.

ISEER = INDIAN SEASONAL ENERGY EFFICIENCY RATIO





**THANK  
YOU!**

**[www.airconditionermart.com](http://www.airconditionermart.com)**  
**Sales-98-52785278**